



Range Overview


Deltec AGM batteries are designed to deliver optimal performance in standard cyclic and deep cycle applications. Deltec AGM batteries are completely sealed, highly resistant to vibration and built to be extremely durable, utilising high-density active material and a heavier plate design.

Key Features / Benefits

- Designed to excel in cyclic applications
- Heavier plates for consistent power delivery
- High-density active material for increase durability
- Vibration resistant
- Meets eco standards with a fully sealed design
- Valve Regulated
- Flame Arrestors
- Maintenance Free Design

Technical Specifications

| | |
|------------------|--------------------------------------|
| Voltage: | 12 volts |
| Ah: | 100 Ah @c20 |
| Weight: | 29.0 Kg |
| Dimensions: | 307 x 168 x 211 (214)mm |
| Container: | ABS |
| Terminal Type: | M8 Insert |
| Terminal Layout: | LHP (Left Hand Positive) |
| Certificates: | ISO-9001 ISO-14001 OHSAS-18001 |

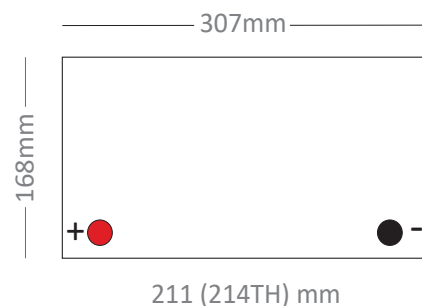


Terminal Style
M8 Insert




For warranty terms & conditions, visit www.dcdowunder.com.au

Specifications Overview


Discharge characteristic

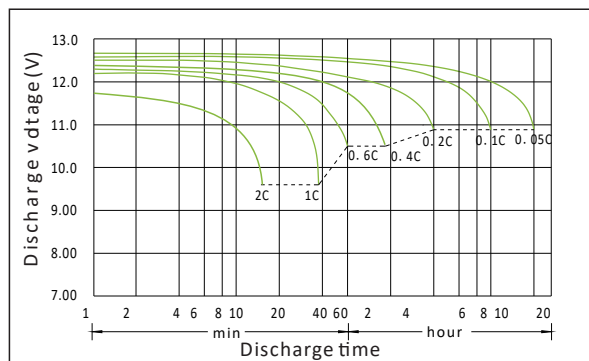


Charging characteristic

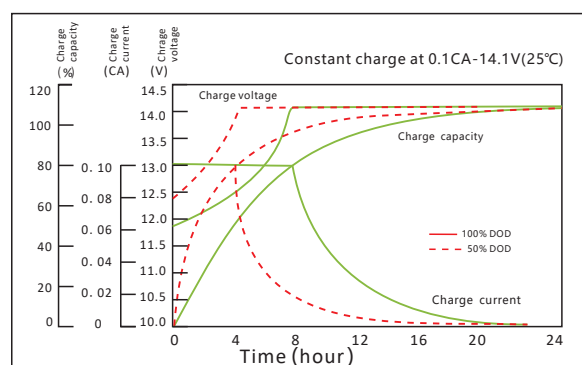


The effect of temperature on capacity

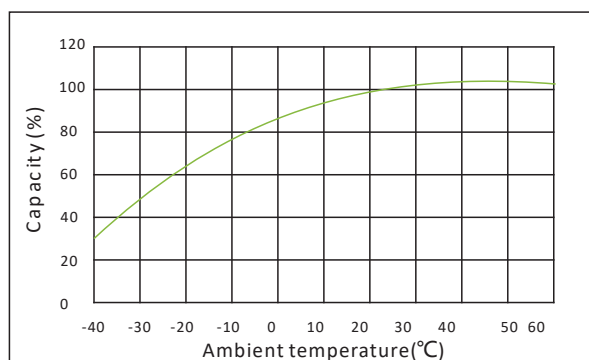


The effect of discharge depth on cycle life

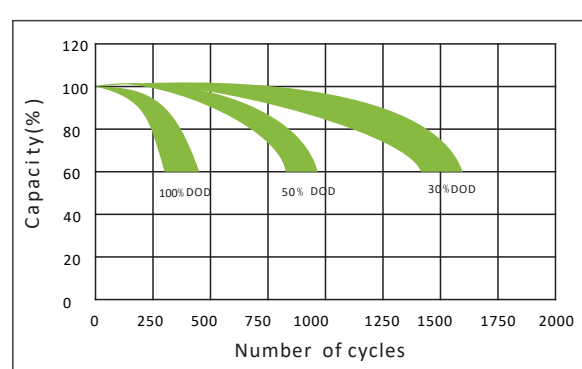

Curves of self-discharge

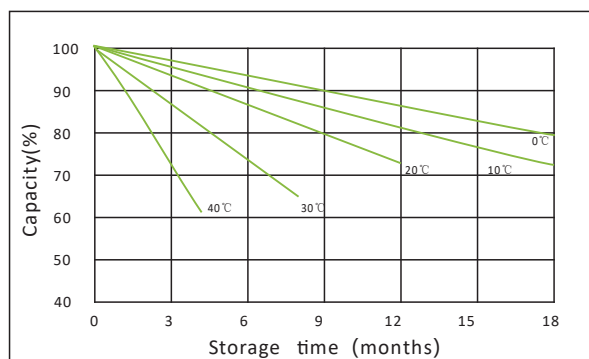

Curves of open circuit voltage vs. capacity

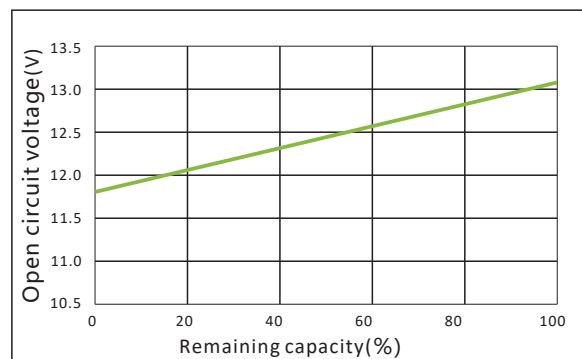

For warranty terms & conditions, visit www.dcdowunder.com.au