


SEAM CLAMPS



PRODUCT SHEET

Large selection of
mounting solutions

Direct mounting on any
available seam roof

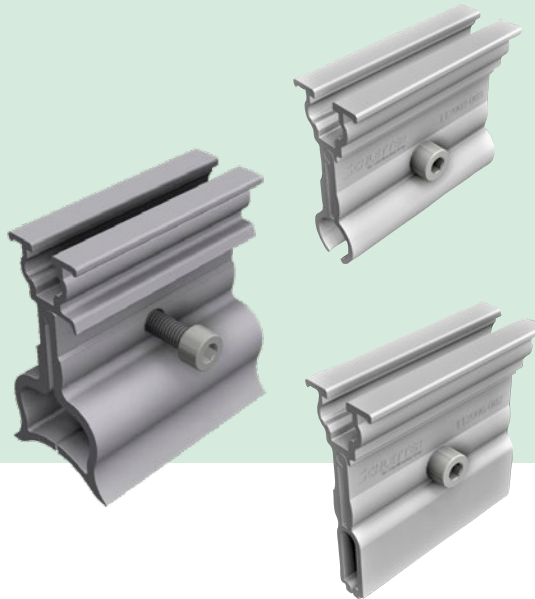

FOR ALMOST ANY TYPE OF SEAM ROOF

Schletter seam clamps offer perfect mounting solutions for almost any type of seam roof. (Alternatively, our FixPlan system also enables direct mounting into the substructure – see FixPlan product sheet).

NOTE

In case of titanium zinc sheet metal, the load-bearing capacity of the seams must be observed.









Compatibility must also be checked on site.

TECHNICAL SPECIFICATIONS

Scope of application	Sheet metal seam roofs with load-bearing sheet metal seams
Material	Clamps: Aluminium Clamps 112001-000 and 112007-000: Stainless steel 1.4301 Screws: Stainless steel
Planning aid	Configuration and structural analysis via Schletter Configurator
Structural analysis	Structural analysis based on recognized engineering standards. Verification of structural safety of the mounting system is based on Eurocodes and general construction approvals. The load assumptions comply with DIN EN 1991-1 and the regulations of the national annex. Roofing and building certificates are not included. Any instructions on required certification and approval must be observed.
Warranty	25 years on structural components, according to our warranty terms
Supplementary documents	Assembly instructions Seam Clamps Component overview – Special fastening solutions

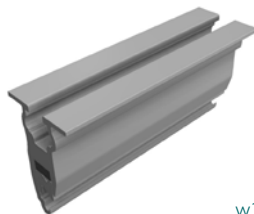

SEAM CLAMPS

ARTICLE OVERVIEW

112001-000	Seam clamp 503 VA for standing seam roof	PU:50	
112001-005	Seam clamp 503 for standing seam roof	PU:50	
112001-010	<p>Seam clamp 504 for standing seam roof <i>Suitable in particular for double standing seam roofs made of titanium zinc sheet metal</i></p> <p>The 504 seam clamp was developed in cooperation with Rheinzink for applications on double standing seam roofs made of titanium zinc sheet metal and also approved by Rheinzink. Profiles mounted on the standing seam clamps must not exceed a length of 3 m without thermal separation.</p> <p>Possible seam dimensions (observe dimensional drawing):</p>	PU:50	  <p> $h = 11 - 13 \text{ mm}$ $w1 = 4 - 6 \text{ mm}$ $w2 = \text{max. } 3 \text{ mm}$ </p>
112002-003	Seam clamp 510 for Kalzip®, Bemo®	PU:50	
112003-003	Seam clamp 520 for Zambelli RIB-ROOF 465* et al.	PU:50	
112004-002	Seam clamp 522 for Zambelli RIB-ROOF 500* et al.	PU:50	
112006-002	Seam clamp 524 for FischerKLIPTEC* 52/400 et al.	PU: 50	


SEAM CLAMPS

ARTICLE OVERVIEW

112007-000	Seam clamp 525 VA for Domico Domitec®* et al.	PU: 50	
112012-007	Seam clamp 551 for KlipLok 700/406 <i>For KlipLok 700 HiStrength, Classic 700, 406 et al.</i>	PU: 100	

*All trademarks mentioned herein are the property of their respective owners.

ACCESSORIES (to be ordered separately)

129063-020	Rapid cross-connector <i>Fully pre-assembled for Klicknut M8 For cross rail system of the Standard series</i>	PU: 200	
-------------------	--	---------	---