
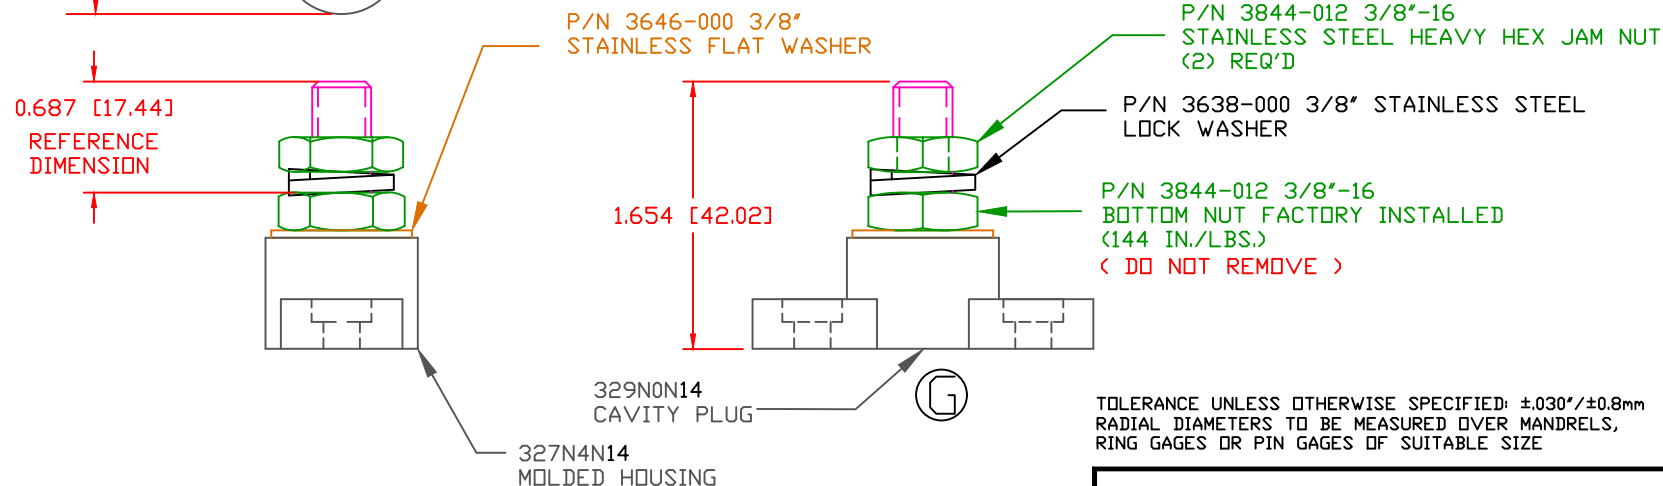


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	ADDED MATERIAL AND PERFORMANCE NOTES	1-22-04	BRH
B	REVISED PERFORMANCE NOTES	2-23-04	BRH
C	3844-002 WAS 3844	5-18-05	BRH
D	REPLACED (1)-3844-002 WITH (1)-3844	9-01-05	BRH
E	ADDED OPTIONAL CONSTRUCTION NOTE AND -000 SUFFIXES	4-04-06	BRH
F	REMOVED OPTIONAL CONSTRUCTION NOTE	10-08-15	RAS
G	PN 329NOV** CHANGED TO 329NON**	6-32-16	MDL
H	3844-012 WAS 3844-003	12-01-16	JMM
I	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS

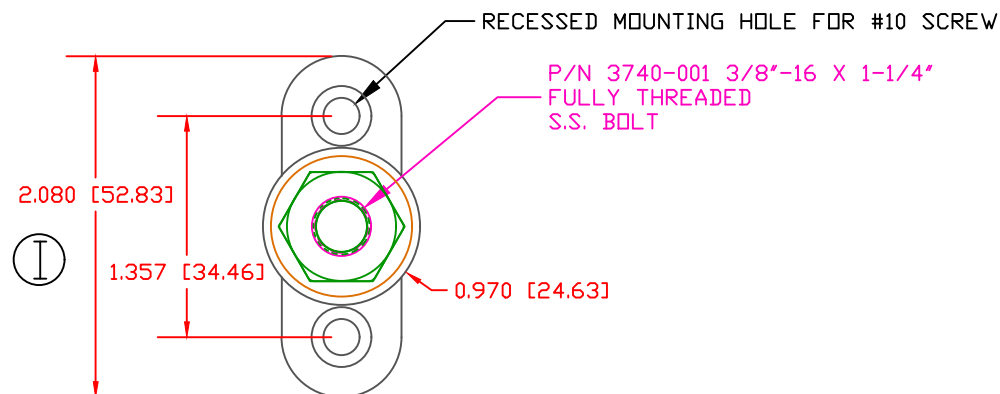

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8mm$
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
 CURRENT RATING: 250 AMPS
 TEMP. RISE AT LOAD: 46 DEG. F.
 RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE: 09APR03	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: 3/8" SMALL JUNCTION POST			SCALE: NONE
MATERIAL:		PART NO.	
COLOR: BLACK	DRG CLASS REV I	77037N14	