


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	3874-000 WAS 3872-000	12JUL06
B	3842-001 WAS 3842-002	14AUG06


P/N 31231 BASEPLATE
MATERIAL: 16% GLASS FILLED NYLON
(RED AND BLACK VERSIONS)

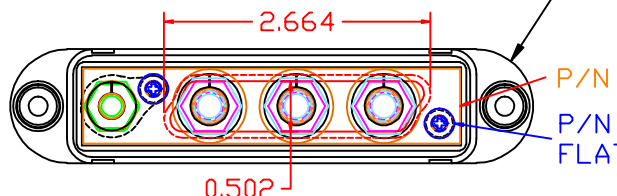

P/N 3885-000 NICKEL PLATED BRASS ALLOY CONTACT PLATE

P/N 3874-000 #8 X 3/8" PHILLIPS
FLATHEAD HIGH LOW SCREW (2 PLCS)

(A)

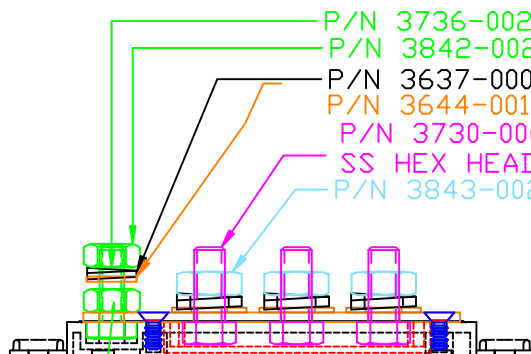

P/N 3736-002 1/4"x3/4" SS HEX HEAD BOLT

P/N 3842-002 1/4"-20 HEAVY HEX SS NUT

P/N 3637-000 1/4" SS SPRING WASHER

P/N 3644-001 1/4" SS FLAT WASHER


P/N 3730-006 5/16-18"x3/4" FULLY THREADED

SS HEX HEAD BOLT (3 PLCS)

P/N 3843-002 5/16" HEAVY HEX SS NUT 3 PLCS.

P/N 3642-000 5/16" SS
SPRING WASHER (3 PLCS)

P/N 3645-000 5/16" SS
FLAT WASHER (3 PLCS)



P/N 3842-001 1/4"-20 TIN-PLATED
BRASS HEAVY HEX NUT
APPLY BLUE MARK AT ASSEMBLY TO
SIGNIFY CONDUCTIVE NUT

(B)

DO NOT SCALE


MAXIMUM AMPERAGE: 210 AMPS @12VDC

BASE MATERIAL:

BASE MATERIAL U.L. RATING:

GLASS-REINFORCED NYLON
94 HB

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8mm$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
		REF: *****	DATE: 22FEB06	DRN BY: BRH
TITLE: 5/16" 4-POINT CONTACT PLATE				SCALE:
MATERIAL:			PART NO.	
COLOR: *****	DRG CLASS *****	7705N0 N14		