

### SPECIFICATION / TECHNICAL SHEET

#### Specifications

Nominal Voltage		12.8V
Nominal Capacity (25°C, 0.33C)		100Ah
Dimensions	Length	483±3mm
	Width	170±3mm
	Height	241±3mm
	Total Height	241±3mm
Approx. Weight		19.6kg

#### Characteristics

Terminal type	M8
Max Charge Voltage	14.6V±0.2V
Standby Voltage	13.8±0.2V
Cut-off Voltage	10V
Max. Discharge Current	150A
Max Pulse Discharge Current (3 sec)	400A
Max Charge Current	150A
Recommended Charge Current	< 75A
Cycle Life (100% DoD)	1800+
Operating Temp - Charge	0°C - 45°C
Operating Temp - Discharge	-20°C - 60°C
Short Circuit Release	Yes
Max. Series / Parallel Configuration	4S or 4P
Cell Type	Prismatic
Cell Chemistry	Lithium Iron Phosphate (LiFePO <sub>4</sub> )
BMS Protection	Yes
Warranty	3 Years

#### Applications

- Deep-cycle
- 4x4 Vehicles
- Recreational Vehicles
- Caravan / Camping
- Fast Recharge Requirements
- Low Weight Applications
- Marine
- Golf Carts
- Personal Power
- Non-Starting



SLZ12V200S Shown

#### About Zeal Lithium

Zeal lithium is an economical 12V Lithium Iron Phosphate (LiFePO<sub>4</sub>) solution by Sealed Performance Batteries (SPB) which provides the core performance and safety advantages of a modern lithium battery in a well-built design.

Backed by SPB, a company with over 25 years of experience in the energy storage industry, and designed to the best possible specifications, you can be confident that Zeal lithium has had every detail thoroughly examined in delivering a high-value solution.

#### Safe And Stable

Zeal provides a high degree of safety by utilising light-weight aluminum encased LiFePO<sub>4</sub> prismatic cells, which are among the safest and most stable lithium cells available.


It is also supported by an integrated BMS that protects against overcharge/discharge, temperature and short circuit events for complete confidence when in operation.

#### Core Lithium Advantages


A perfect AGM replacement, Zeal comes complete with a 3 year warranty and all the features you would expect from a LiFePO<sub>4</sub> product including fast recharge capabilities, low self-discharge rate, long runtime and more usable capacity for power when you need it most.

Need a larger solution? Up to 4 batteries can also be connected in parallel or series configurations to meet the needs of more demanding systems.


Discharge Curve at Different C Rates

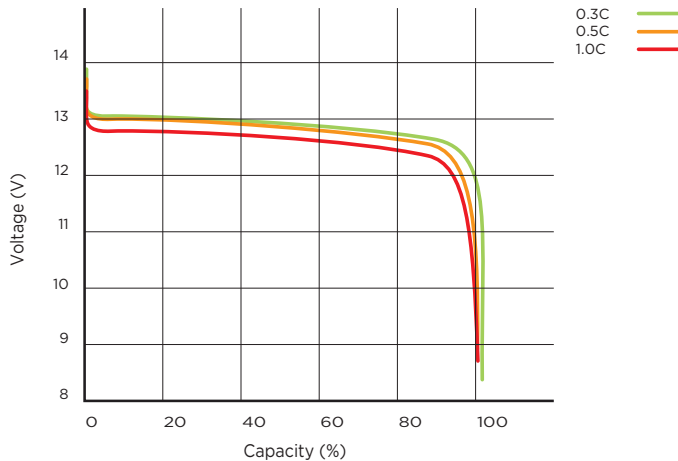


Charging Characteristic (25°C @ 0.33C)

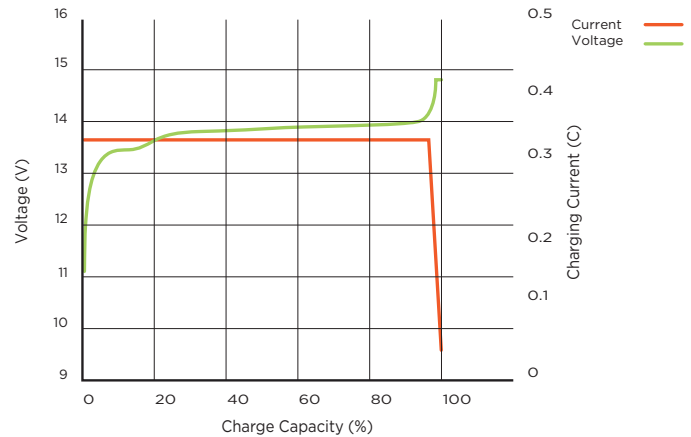

Cycle Life at Different DoD

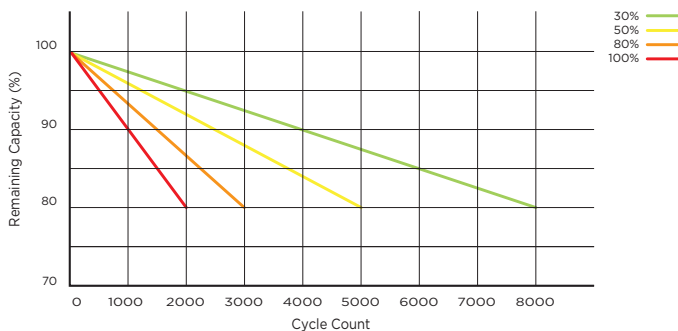

Discharge Curve at Different Ambient Temperature (0.33C)

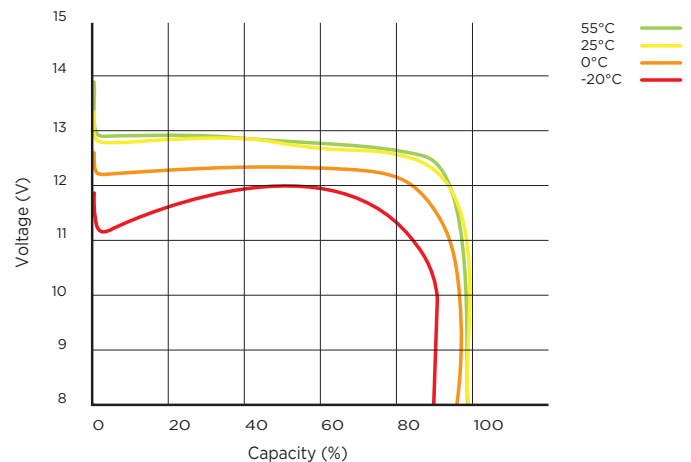

For pricing and availability please contact the team at  
SPB on 1300 001 772 or [sales@spb.net.au](mailto:sales@spb.net.au)